


S/N 10/014777



#5

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Nagian	Examiner:	UNKNOWN
Serial No.:	10/014777	Group Art Unit:	2681
Filed:	10/29/01	Docket No.:	975.376USW1
Title:	A METHOD FOR POSITIONING A MOBILE STATION		

CERTIFICATE UNDER 37 C.F.R. 1.8: The undersigned hereby certifies that this Transmittal Letter and the paper, as described herein, are being deposited in the United States Postal Service, as first class mail, with sufficient postage in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231 on 8 Feb 02

Michael B. Lasky  
Name

[Signature]  
Signature

**SUBMISSION OF PRIORITY DOCUMENT**

Box MISSING PARTS  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

Enclosed is a certified copy of European application, Serial Number  
PCT/EP99/03089, filed 5 May 1999, the priority of which is claimed under 35 U.S.C.  
§120.

Respectfully submitted,

Altera Law Group, LLC  
6500 City West Parkway, Suite 100  
Minneapolis, MN 55344-7701  
(952) 253-4106

Date: 8 Feb 02

By: [Signature]

Michael B. Lasky  
Reg. No. 29,555  
MBL/jsa

Europäisches  
Patentamt

European Patent  
Office

des brevets



### Bescheinigung

### Certificate

### Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten internationalen Patentanmeldung überein.

The attached documents are exact copies of the international patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet international spécifiée à la page suivante.

Den Haag, den  
The Hague,  
La Haye, le

15 NOV 2001

Der Präsident des Europäischen Patentamts  
Im Auftrag  
For the President of the European Patent Office  
Le Président de l'Office européen des brevets  
p.o.

Y. Marinus-v.d. Nouweland

Patentanmeldung Nr.  
Patent application no. PCT/EP 99/03089  
Demande de brevet n°

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**



Anmeldung Nr.: PCT/EP 99/03089  
Application no.:  
Demande n°:

Anmelder: 1. NOKIA TELECOMMUNICATIONS OY - Espoo, Finland  
Applicant(s): 2. NAGHIAN, Siamäk - Espoo, Finland  
Demandeur(s):

Bezeichnung der Erfindung:  
Title of the invention: A METHOD FOR POSITIONING A MOBILE STATION  
Titre de l'invention:

Anmeldetag:  
Date of filing: 05 May 1999 (05.05.99)  
Date de dépôt:

In Anspruch genommene Priorität(en)  
Priority(ies) claimed  
Priorité(s) revendiquée(s)

Staat:	Tag:	Aktenzeichen:
State:	Date:	File no.
Pays:	Date:	Numéro de dépôt:

Benennung von Vertragsstaaten : Siehe Formblatt PCT/RO/101 (beigefügt)  
Designation of contracting states : See Form PCT/RO/101 (enclosed)  
Désignation d'états contractants : Voir Formulaire PCT/RO/101 (ci-joint)

Bemerkungen:  
Remarks:  
Remarques:

## PCT REQUEST

WO 23998

Original (for SUBMISSION) - printed on 05.05.1999 01:26:47 PM

IV-1	<b>Agent or common representative; or address for correspondence</b> The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:	agent
IV-1-1	Name (LAST, First)	PELLMANN, Hans-Bernd
IV-1-2	Address:	Tiedtke-Bühling-Kinne et al. Bavariaring 4 D-80336 München Germany
IV-1-3	Telephone No.	+49 89 544690
IV-1-4	Facsimile No.	+49 89 532611
IV-1-5	e-mail	postoffice tbk-patent.com
IV-2	Additional agent(s)	additional agent(s) with same address as first named agent
IV-2-1	Name(s)	TIEDTKE, Harro; BÜHLING, Gerhard; KINNE, Reinhard; GRAMS, Klaus; LINK, Annette; VOLLNHALS, Aurel; LESON, Thomas, Johannes, Alois; TRÖSCH, Hans-Ludwig; CHIVAROV, Georgi; GRILL, Matthias; KÜHN, Alexander; OSER, Andreas; BÖCKELEN, Rainer
V	Designation of States	
V-1	<b>Regional Patent</b> (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AP: GH GM KE LS MW SD SZ UG ZW and any other State which is a Contracting State of the Harare Protocol and of the PCT EA: AM AZ BY KG KZ MD RU TJ TM and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT EP: AT BE CH&LI CY DE DK ES FI FR GB GR IE IT LU MC NL PT SE and any other State which is a Contracting State of the European Patent Convention and of the PCT OA: BF BJ CF CG CI CM GA GN GW ML MR NE SN TD TG and any other State which is a member State of OAPI and a Contracting State of the PCT
V-2	<b>National Patent</b> (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AE AL AM AT AU AZ BA BB BG BR BY CA CH&LI CN CU CZ DE DK EE ES FI GB GD GE GH GM HR HU ID IL IN IS JP KE KG KP KR KZ LC LK LR LS LT LU LV MD MG MK MN MW MX NO NZ PL PT RO RU SD SE SG SI SK SL TJ TM TR TT UA UG US UZ VN YU ZA ZW

## A METHOD FOR POSITIONING A MOBILE STATION

### Field of the invention

5

The present invention relates to a method for locating a mobile station, and especially to a method for locating a mobile station in WCDMA (Wideband Code Division Multiple Access).

10

### BACKGROUND OF THE INVENTION

There are several methods that have been developed for mobile station (MS) location determining. Among others, Time Of Arrival (TOA), Time Difference Of Arrival (TDOA), and Enhanced Observed Time Difference (E-OTD) are the most potential ones. Some of these methods like TOA and E-OTD have already been potential candidates for the T1P1 specification work.

As far as the WCDMA (Wideband Code Division Multiple Access) system is in question, the dynamic range of coverage availability is a critical problem while applying existing positioning methods (methods for locating the position) in the system. Practically, the links between the mobile station (MS) and the base station (BS), which are essential for MS positioning calculation, aren't always available or the quality levels of the transmitted signals aren't in the requested level. That is the case e.g. in some rural area due to coverage unavailability or in urban and indoor area due to shadowing and the so-called NLOS (Not Line of Sight). In the worst case, a mobile station MS is not even within the coverage of any of the related base stations due to

35

the so-called near-far problem which is caused by slow and fast fading and intra/inter cell interference in the system environment.

5 Fig. 1 illustrates a very typical problem of the cellular MS positioning in WCDMA system. In Fig. 1, three base stations BS1 to BS3 serving for three cells C1 to C3, respectively, are shown. The coverage of the corresponding cells of the base stations differ between a  
10 reduced cell's coverage and an extended cell's coverage, as indicated in Fig. 1. Furthermore, three mobile stations MS1 to MS3 are shown which are situated at different positions within and without the coverage of the cells. The positions of the mobile stations are  
15 indicated by an 'X' in the figure.

In order to determine the positioning of a mobile station the LOS (Line Of Sight) of three base stations are necessary for most of existing algorithms. As it is shown  
20 in Fig. 1, the mobile station MS1 has lost the LOS to all of the three base station BS1 to BS3. The mobile station MS2 isn't within the original coverage of any of the base stations, but not far away from the border. On the other hand, the mobile station MS3 is such close to the base  
25 station BS3 that the receiving signal with satisfied SIR (Signal to Interference Ratio) level from other base stations is almost impossible or it is contradictory with overall system performance. Indeed, the situation of the mobile station MS3 may be the most usual and critical  
30 situation concerning the MS positioning while algorithms like TOA, TDOA are applied.

In comparison with GSM, another specific problem is related to the transmitted power or the level of the  
35 interference due to MS positioning. The less the

interference caused by mobile positioning is, the better is the capacity and overall system performance for the WCDMA system.

5 From system architecture point of view, there should be entity(s) that take care of the allocated power/interference for MS positioning purposes and its effect on the system's overall power/interference situation. Moreover, the functional allocation and their  
10 implication for the system interfaces should be determined.

The most potential solution for above-mentioned problems is using the DTX (discontinuous transmission) feature of  
15 base stations. For instance, in Fig. 1, for the case of the mobile station MS3, transmission of the serving base station BS3 can be stopped for certain time so that the mobile station MS3 does location measurements from signals of neighbouring base stations (here BS1 and BS2)  
20 during the idle slot.

However, even using this solution causes remarkable additional interference to the system and ultimately reduces the overall system capacity by changing the  
25 power/interference level in the system and making it unstable. Furthermore, in the case of the situation of the mobile station MS1 or the mobile station MS2 illustrated in the Fig. 1, this would be an even more problematic solution.

30

#### SUMMARY OF THE INVENTION

Thus, the object underlying the invention is to provide a  
35 method for locating the position of a mobile station

which is able to reliably locate the position of the mobile station also in a case that no direct connection to a base station is possible.

5 This object is solved by a method for locating a mobile station comprising the steps of using fixed transmitting stations for locating a target mobile station by transmitting a measurement signal from each fixed transmitting station to said mobile station, using a  
10 relay station which is adapted to receive said measurement signal from the corresponding fixed transmitting station and to forward said signal to said target mobile station, in case a direct transmission from one or more of said fixed transmitting stations is not  
15 available, and determining the distance between said target mobile station to the fixed transmitting stations and/or the relay stations on the basis of said measurement signal, and locating the position of said target mobile station on the basis of the determined  
20 distances.

By the above method, it is possible to locate a mobile station even if there is no LOS (Line of Sight), i.e., a direct connection via air, to neighbouring base stations.

25 Moreover, by the method according to the present invention it is possible to locate a mobile station by one or two LOS (Line of Sight) from neighbouring base stations without any special antenna or additional  
30 complexity to the mobile station or the base station.

Furthermore, the interferences due to a positioning process are reduced. This is a vital issue for WCDMA, since WCDMA is a very interference dependent multiple  
35 access.



Further advantageous developments are defined in the dependent claims.

5 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more readily understood with reference to the accompanying drawings in which:

10 Fig. 1 illustrates the specific problem of positioning a mobile station in WCDMA environment;

Fig. 2 illustrates LOS availability by using relay techniques in positioning a mobile station according to a  
15 first embodiment of the invention;

Fig. 3 illustrates a process for positioning a mobile station by using three MS nodes according to the first  
20 embodiment of the invention;

Fig. 4 illustrates use of a relay based method when only a signal of one base station is available according to a second embodiment;

25 Fig. 5 shows a block diagram of a generic location service logical architecture in UMTS;

Fig. 6 shows a block diagram of a functional model and reference configuration of mobile positioning;

30 Fig. 7 illustrates a process of a general network positioning for an MT-LR; and

Fig. 8 illustrates a process of positioning for an MO-LR  
35 Request.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In the following, a preferred embodiment of the invention is described in more detail with reference to the  
5 accompanying drawings.

The most important characteristic of the invention is to use the cellular relay technique like Opportunity Driven Multiple Access (ODMA) to deal with the previously  
10 mentioned problems and at the same time to minimize the capacity reduction of the system due to mobile positioning service.

ODMA is a mechanism for maximizing the potential for  
15 effective communication. This is achieved by distributing intelligence within communicating nodes and providing multiple communication paths between them. The intelligent nodes measure and evaluate their communications options and adapt to exploit the optimum  
20 opportunity. The WCDMA is sufficiently flexible to support relaying with negligible increase to the MS complexity or cost. WCDMA can therefore offer the flexibility of simple relaying but also provide a suitable platform for advanced relay protocols such as  
25 ODMA.

The basic approach of the invention can be figured out by describing some of the most usual cases as were shown in  
30 Fig. 1.

In a first case, it is assumed that a target mobile station (in the following referred to as target MS) that is going to be located doesn't receive a required signal for positioning purposes from enough numbers of  
35 neighbouring base stations due to shadowing, fading or

other factors which affect on radio wave characteristics. By utilizing ODMA like a relay technique, in every cell serving by the base station BS1 there are some seeds (i.e., fixed mobile stations that never move and are  
5 always powered on) or moving mobile stations which can act as relay nodes in the system. Relaying is used to route the data required from and to the mobile involving in the positioning process to the corresponding nodes or base stations. The relay nodes in range of the base  
10 stations will toggle between ODMA and WCDMA modes. By using intelligent relay techniques, the coverage of cell(s) can even be extended to cover the mobile stations which accommodate near the border outside the radio coverage.

15  
Fig. 2 illustrates the situation and the related approach of the invented method to locate the target MS by applying Time Of Arrival (TOA), Time Difference Of Arrival (TDOA) or any similar algorithms which required  
20 LOS (Line Of Signal) from some base stations.

In Fig. 2, in addition to Fig. 1 a plurality of mobile stations MSN1 to MSN5 are shown which serve as the above mentioned relay stations and will be referred to as  
25 mobile station node or MS node in the following. An MS node can be a movable or fixed mobile station, any element of the cellular system with a relay functionality, a positioning service provider device, or a GPS node that can be used as a reference point for the  
30 positioning process.

As shown, by utilizing relay techniques like ODMA it would be possible to provide LOS from neighbouring base stations to the mobile station that is intended to be  
35 located. At this stage, all required measurement for

calculating of the mobile station location according to TOA, TDOA or similar algorithms can be obtained. It should be emphasised that the relay nodes have already the required LOS of base stations and their location or  
5 their distance from the serving base station should be determined before this process so that there will be geographical coordinates for further calculation. In addition to the basic calculations, the measurement error especially in case relay nodes are not fixed should be  
10 taken into account.

In Fig. 3, positioning of a target mobile station MS1 by using three MS nodes MSN1, MSN2 and MSN3 is shown. The MS nodes MSNi ( $i = 1$  to 3) serve as relays, as described  
15 above. A MS node may be a mobile facilitated by any relay technique or positioning technique like GPS that enable it to be used as a reference point for positioning purposes. It can be either fixed (e.g. any client which provides positioning services) or movable (e.g. mounted  
20 in a taxi).

In Fig. 3 the parameter  $D_i$  is the distance between the MS nodes MSNi ( $i = 1$  to 3) and the mobile station MS1 that is to be located. In case the MS nodes act as seeds, i.e.  
25 they don't move,  $D_i$  can be determined according to the propagation time delay of the radio wave as used in TOA, TDOA or other similar algorithm, that is:

$$D_i = c\Delta t_i \quad (1)$$

30

Where  $c$  is the light velocity and  $\Delta t_i$  is the propagation delay of the radio signal between the mobile station MS1 and the MS node MSNi.

In case all nodes or any of them move, then the error due to the movement can be taken into account according to following expressions:

$$\begin{aligned} D1' &= c\Delta t1 + \beta d1max \\ D2' &= c\Delta t2 + \beta d2max \\ D3' &= c\Delta t3 + \beta d3max \end{aligned} \quad (2)$$

Where:

$$\begin{aligned} dimax &= v_{imax}\Delta t + e \\ -1 &\leq \beta \leq 1 \end{aligned}$$

Thus, for example in case of the MS node MSN1, the real distance D1' is approximated by using the distance D1 = cΔt which is only based on the propagation delay of the radio waves and by using the maximum distance d1max by which the MS node MSN1 can move during the propagation delay Δt. The distance dimax depends on the velocity vimax of the MS node MSNi during the propagation delay Δt. Furthermore, also a measurement error e can be taken into account. The parameter β indicates an uncertainty of the deviation caused by the movement. In other words, as shown in Fig. 3, the real position of the MS node MSN1 can be anywhere within the circle of the radius d1max.

Alternatively, the implication of mobility of the MS node MSNi can be calculated according to following equation:

$$D'i^2 = Di^2 + dimax^2 - Di \cdot dimax \cdot \cos\alpha \quad (3)$$

where:

$$0^\circ \leq \alpha \leq 180^\circ$$

In this case, however, the angle  $\alpha$  between  $D_i$  and  $d_{\max}$  has to be known. That is, a special antenna has to be provided on the MS nodes which is capable of measuring the angle between two signal components. However, in  
5 practice the distance  $D_i$  is much greater than the distance  $d_{\max}$  since. Thus, in general utilising equation (2) would be practically sufficient and easier.

Next, a second case is described. In this case  
10 positioning may be requested for a mobile station which is near the serving base station BS as is the case for MS3 in Fig. 1. In order for MS3 to be located it should receive signals from neighbouring base stations but since the signal from its serving base station BS is dominant,  
15 the mobile station MS3 does not receive signals from other base stations with a desirable level for positioning purposes. In this case, as it is shown in Fig. 4, the signals of MS nodes MSN1 and MSN2 can be used to get the required LOS (Line Of Sight) for positioning  
20 the mobile station MS3.

The MS nodes can be either within the of same cell where the mobile is situated or can be in a neighbouring cell. In the former situation, as shown in Fig. 4, the location  
25 of mobile can be calculated according to equation (2). For calculating  $D_i$  however,  $d_{\max}$  isn't necessary because the base station BS is fixed. If the MS nodes are within the neighbouring cell coverage there are two possibilities:

30  
1. Positioning the mobile station MS3 (i.e., locating its position) by calculating its coordinates based on coordinates of the MS nodes MSN1 and MSN2 and the coordinates of the base station BS coordinates by  
35 applying equation (2).

elements and interfaces are specified for the LCS  
(Locating Service) purposes.

From logical architecture perspective, unlike GSM system,  
5 in UTMS the use of a SMLC (Serving Mobile Location  
Center) is neglected. Consequently the positioning  
calculation is fulfilled at radio network controller  
(RNC) of the corresponding radio access network (RAN).  
So, the functionality of the Ls interface (interface  
10 between SMLC and MSC in GSM LCS) is allocated to the Iu  
interface, which is interface between the core network CN  
and the radio access network RAN. In addition, according  
to the present embodiment, a location measurement unit  
LMU is integrated into the base station BS.

15 In the following, the network elements involved in LCS  
are described in more detail.

First, the Location Measurement Unit (LMU) is described.  
20 The main function of LMU is to make radio measurements  
including Real Time Difference (RTD), Absolute Time  
Differences (ATD), or any other kind of radio interface  
timing measurement of the signals transmitted by base  
stations. These assistance measurements obtained by LMU  
25 functionality in the base stations BS have a generic  
status in being usable by more than one positioning  
method. These measurements may consist of location  
measurements specific to one mobile used to compute the  
location of those mobile or assistance measurements  
30 specific to all mobiles in a certain geographic area.

All location and assistance measurements obtained by an  
LMU are supplied to a particular SRNC (Serving Radio  
Network Controller) associated with the base station BS  
35 having the LMU functionality. Instructions concerning the

timing, the nature and any periodicity of these measurements are either provided by the SRNC or are pre-administered in the BS.

- 5 In GSM LCS, the LMU is a separate element from the GSM network. The communication between the GSM network and LMU is done through GSM air-interface. In UMTS LCS, the LMU functionality should be integrated in the base station. There should not be any technical restrictions  
10 to do that, at least when ISFL (Idle Slot Forward Link) - TDOA method is used.

Next, the mobile station is described. Depending on the provided positioning services, the mobile station may be  
15 involved in the positioning procedures in various levels. In addition to that, the role of the mobile station is closely related to the positioning approach used in the system. For instance, in network based positioning approach its functionality does not encompass MS location  
20 calculation whilst in mobile-based positioning approach it does.

Furthermore, the mobile station can be equipped by GPS functionality. Then, it can provide required data to/from  
25 the network (RAN) for positioning purposes.

The mobile terminal itself can request the network to determine its position (network assisted positioning).

- 30 In the following, an UMTS Terrestrial Radio Access Network (UTRAN) is described. The Serving Radio Network Controller (SRNC) which is a network element of UTRAN, contains functionality required to support LCS in one PLMN (Public Land Mobile Network). The SRNC manages the  
35 overall coordination and scheduling of resources required



to perform positioning of a mobile. It also calculates the final location estimate and accuracy.

The SRNC controls a number of LMUs for the purpose of  
5 obtaining radio interface measurements to locate or help  
locate MS subscribers in the area that it serves. The  
SRNC is administered with the capabilities and types of  
measurement produced by each of its LMUs. Signaling  
between an SRNC and LMU is transferred via the lub and in  
10 some specific period via lur interfaces. The following  
measurements returned by an LMU to an SRNC have a generic  
status in being usable for more than one positioning  
method (e.g. including TOA).

15 Next, radio interface timing information are described.  
Generally, the UTRAN is involved in the handling of  
various positioning procedures. As a generic handling  
procedure, the UTRAN provides Cell ID (cell  
identification) and timing related data, e.g., timing  
20 advance (frame timing offset) to the 3G-MSC (Mobile  
service Switching Controller of the third generation). In  
case the 3G-SGSN (Service GPRS Support Node for Third  
generation) has independent mobility management, UTRAN  
provides Cell ID to SGSN either. The LCS parameters are  
25 included to the lu interface.

The RAN (radio access network) level overall controlling  
of the LCS is the functionality of UTRAN. Thus,  
controlling of the e.g. IS-DL (Idle Slot Downlink) like  
30 mechanism pertains to the UTRAN's functionality.  
Therefore, SRNC may control such mechanisms according to  
pre-designed patterns or algorithms that take into  
account the dynamic behaviour of the network by utilizing  
handover, power control and load control data. The UTRAN  
35 also manages the overall coordination and scheduling of

resources required to perform positioning the mobile. In the network-based positioning approach UTRAN calculates the final location estimate and accuracy.

- 5 The UTRAN controls a number of LMUs/BSS (Location measurement units/base stations) for the purpose of obtaining radio interface measurements to locate or help locate a mobile station in the serving area.
- 10 The 3G-MSC/VLR (3G-MSC, i.e., Mobile Services Switching Center for third generation or UMTS, including a Visitor Location Register) contains functionality which is responsible for mobile authorization and managing call-related and non-call related positioning requests of UMTS
- 15 LCS.

Moreover, a Service GPRS Support Node (3G-SGSN) contains functionality responsible for mobile authorization and managing call-related and non-call related positioning

20 request of UMTS LCS as far as the packed switched accesses are concerned.

For example, the 3G-SGSN can decide whether an Internet server request for the MS position is related to an

25 ongoing MSC call related or non-call related.

In this case, the external server could request the SGSN what is the identity behind the given dynamic IP address. The mobile application could also request the telephone

30 number from the user.

One way would be if the external server could request a Gateway Mobile Location Center (GMLC) for the position of the terminal using the given (dynamic) IP-address. The

MLC (Mobile Location Center) requests SGSN for the positions by using this IP address for the terminal.

It seems that the mobile terminal should request its own position, because the external server has difficulties in identifying the user.

If the SGSN informs a DNS server of the mapping of IMSI (International Mobile Subscriber Identity) and dynamic address, and if the DNS knows the mapping of IMSI and user logical name, then with DNS reverse interrogation, the external server could know the user logical name which is a stable ID. With a preparatory interrogation the DNS could give also logical name to IMSI mapping (or directly IP address to IMSI mapping).

The GMLC (Gateway Mobile Location Center) receives service requests from the external Client or the mobile terminal itself (network supported positioning) and activates the UMTS LCS system, if needed. It has to be noted that the GMLC basically is a gateway element which enables a connection of the network to any external client. The GMLC may request routing information from the HLR (Home Location Register) or MM (Mobile Management) of the 3G-SGSN. After performing registration authorization, it sends a positioning request to and receives final location estimates from the 3G-MSC and 3G-SGSN. Also, GMLC functionality may be integrated in the 3G-MSC or in an OMC (Operation and Maintenance Center). In case of the OMC, it is much easier to utilize the data related to positioning for network planning purposes, e.g., for optimizing handovers and the network coverage to meet the dynamic range of traffic. Furthermore, in case of a multi-network environment, i.e., a network with both GSM and UMTS, one common GMLC may be used for both of them.

The Home Location Register (HLR) contains LCS subscription data and routing information concerning the subscriber calls. The HLR is accessible from the GMLC via a MAP (Mobile Application Part) based interface.

5

Furthermore, the LCS Client may be any sort of service application offered by service provider or contents provider. The LCS Client is closely related to the variety of the available services. Hence, a further description thereof is omitted in this specification. For example, sometimes the mobile station MS or an service application in the mobile station is also the Client.

In the following, the network interfaces involved are described in more detail.

In addition to the implementation of the LCS for main interfaces of the UMTS system i.e. Uu, lub, lur and lu, the following new interfaces are defined for the LCS purposes:

Firstly, an interface Le between the LCS Client and the GMLC is described, which is denoted with Le.

Le is the interface between Location Application and GMLC network elements. It provides the reference point for transforming of the requested mobile positioning information between the interface Le and GMLC. This information includes the positioning request and the final decision of the positioning process.

In the following, an interface Lh between the GMLC and the HLR is described. The GMLC uses this interface to obtain the routing information from the HLR. The interface Lh is a type of MAP interface and may be

implemented over the SS7 (Signaling System number 7) or possibly over an IP Protocol.

In case packet data and circuit switched parts of the  
5 network use the same mobility management related database, the Lh interface supports both of them.

Next, an interface Lg between the GMLC (Home PLMN or other PLMN) and 3G-MSC network elements is described. It  
10 is used for the 3G-MSC to access to the GMLC for transforming the subscriber information needed, e.g., for authorization and positioning access routing. The interface is a type of MAP interface and may be implemented over SS7 or an IP protocol.

15 Moreover, an interface Lg' described. Lg' is an interface between GMLC and 3G-SGSN network elements. It is used for the 3G-SGSN to access to the GMLC (of HPLMN or other PLMN) for transforming the subscriber information needed,  
20 e.g., for authorization and positioning access routing. The interface is a type of MAP inter-face and may be implemented over SS7 or an IP protocol (MAP over IP).

In the following, a basic functional model of the LCS is  
25 presented. Although, the main architectural aspects are in generic level, the main assumption is that the TDOA or TOA like or any variations of these algorithm are used to calculate the MS location related parameters.

30 The LCS functional model consists of functional entities (FE) and functional interfaces (FI) which are involved in the entire functionality of the LCS. Fig. 6 illustrates the main functional entities and functional interfaces of the LCS in WCDMA system architecture.

The LCS components include the following entities:

- Client Handling in LCS Client,
- 5 • Subscriber Handling in LCS Server,
- System Handling in LCS Server, and
- Client Handling in LCS Server.

10

An LCS client contains an LCS component with one or more client(s) which by using location information can provide location based services.

15

An LCS client is a logical functional entity that requests from the LCS server in the PLMN location information for one or more than one target mobile station within a specified set of parameters such as  
20 Quality of Service (QoS). The LCS Client may reside in an entity (including the mobile station) within the PLMN or in an entity external to the PLMN. The description of the LCS Client's internal logic and its relation to the external use is omitted here.

25

In the following, functions relating to the LCS Client are described.

The Location Client Function (LCF) provides a logical  
30 interface between the LCS client and the LCS server. This function is responsible for requesting location information for one or more than one target mobile station with a specified "QoS" and receiving a response, which contains either location information or a failure  
35 indicator.

In the following, functions related to the LCS Server are described. First, a Client handling component is illustrated.

5 The Location Client Control Function (LCCF) manages the external interface towards the LCF. The LCCF identifies the LCS client within the UMTS PLMN by requesting client verification and authorization (i.e. verifies that the  
10 subscriber) through interaction with the Location Client Authorization Function (LCAF). The LCCF handles mobility management for location services (LCS), e.g., forwarding of positioning requests to 3G-MSC. The LCCF determines if the final positioning estimate satisfies the QoS for the  
15 purpose of retry/reject. The LCCF provides flow control of positioning requests between simultaneous positioning requests. It may order the Location Client Coordinate Transformation Function (LCCTF) to perform a transformation to local coordinates. It also generates  
20 charging and billing related data for LCS via the Location System Billing Function (LSBF).

The Location Client Authorization Function (LCAF) is responsible for providing access and subscription  
25 authorization to a client. Specifically, it provides authorization to a LCS client requesting access to the network and authorizes the subscription of a client. LCAF provides authorization to a LCS client requesting Location Information of a specific MS.

30 An Access Subfunction enables LCS clients to access LCS services. This subfunction provides verification and authorization of the requesting client. When a LCS is requested, the Access Subfunction uses the Information

stored in the LCS client subscription profile to verify that:

- the LCS client is registered; and
- 5     • the LCS client is authorized to use the specified LCS request type;
- the LCS client is allowed to request location
- 10 information for the subscriber(s) specified in the LCS request.

The LCS client subscription profile shall contain a minimum set of parameters assigned on per LCS client

15 basis for an agreed contractual period. The LCS client profile shall contain the following set of access parameters:

- LCS client identity;
- 20     • Allowed LCS request types
- Maximum number of subscribers allowed in a single LCS request;
- 25     • Priority;
- Position override indicator;
- 30     • State(s);
- Event(s) (applicable to LDR requests only)
- Local coordinate system;



- LCS client access barring list (optional); and
- PLMN access barring list applicability.

5 For certain authorized LCS clients internal to the PLMN,  
a subscription profile is unnecessary. These clients are  
empowered to access any defined service that is not  
barred for an MS subscriber. This permits positioning of  
emergency calls without the need for presubscription.

10

A Location Client Coordinate Transformation Function  
(LCCTF) provides conversion of a location estimate  
expressed according a universal latitude and longitude  
system into an estimate expressed according to a local  
15 geographic system understood by the LCF and known as  
location information. The local system required for a  
particular LCF will be either known from subscription  
information or explicitly indicated by the LCF.

20 Next, a system handling component is described which  
comprises a Location System Control Function (LSCF), a  
Location System Billing Function (LSBF) and a Location  
System Operations Function (LSOF).

25 The Location System Control Function (LSCF) is  
responsible for coordinating location requests. This  
function manages call-related and non-call-related  
positioning requests of UMTS LCS and allocates network  
resources for handling them. The LSCF retrieves a MS  
30 classmark for the purpose of determining a positioning  
method. The LSCF performs call setup if required as part  
of a LCS e.g. putting the ME in a dedicated mode and  
obtains Cell-ID. It also supplies coordinate resources  
and activities with regard to requests related to  
35 providing assistance data needed for positioning. This

function interfaces with the LCCF, LSPF, LSBF and PRCF. Using these interfaces, it conveys positioning requests to the PRCF, relays positioning data to the LCCF and passes charging related data to the LSBF.

5

The Location System Billing Function (LSBF) is responsible for charging and billing activity within the network related to location services (LCS). This includes charging and billing of both clients and subscribers.

10 Specifically, it collects charging related data and data for accounting between PLMNs.

The Location System Operations Function (LSOF) is responsible for provisioning of data, positioning capabilities, data related to clients and subscription (LCS client data and MS data), validation, fault management and performance management of UMTS LCS.

Next, a subscriber component is described which comprises a Location Subscriber Authorization Function (LSAF) and a Location Subscriber Privacy Function (LSPF).

The Location Subscriber Authorization Function (LSAF) is responsible for authorizing the provision of a location service (LCS) for a particular mobile. Specifically, this function validates that a UMTS LCS can be applied to a given subscriber. The LSAF verifies the client MS's subscription.

30 The Location Subscriber Privacy function is responsible for performing all privacy related authorizations. For a target mobile station MS it shall authorize the positioning request versus the privacy options of the target mobile station MS, if any.

35

Next, a positioning component is described, which comprises a Positioning Radio Coordination Function (PRCF), a Positioning Calculation Function (PCF), a Positioning Signal Measurement Function (PSMF) and a  
5 Positioning Radio Resource Management (PRRM).

The Positioning Radio Control Function (PRCF) manages the positioning of a mobile through overall coordination and scheduling of resources to perform positioning  
10 measurements. This function interfaces with the PSMF and PCF. The PRCF determines the positioning method to be used based on the QoS, the capabilities of the network, and the MS's location capabilities. It determines which PSMFs to be involved or what to measure, and obtains  
15 processed signal measurements from PSMF. Next, it packs the signal measurement data from the PSMF into a certain format and forwards it to the PCF.

The Positioning Calculation Function (PCF) is responsible  
20 for calculating the position of the mobile station. It obtains BTS (base transceiver station) related data, e.g., BTS geographic coordinates and stores this data. This function applies an algorithmic computation on the collected signal measurements to compute the final  
25 location estimate and accuracy. It also supports conversion of the estimate of the location of the mobile station between different geodetic reference systems.

The Positioning Signal Measurement Function (PSMF) is  
30 responsible for gathering uplink or downlink radio signal measurements for calculation of a mobile's position. These measurements can be positioning related or ancillary.

The Positioning Radio Resource Management (PRRM) entity is responsible for managing the effect of MS positioning on the overall performance of the radio network. PRRM handles following functionalities:

5

- Controlling the variation of the power level of the UL signal (Uplink signal from mobile station to base station) and the DL signal (Downlink signal from base station to mobile station) due to the LCS application.

10

- Calculating the DL and UL power/interference due to MS positioning to admit/reject the new LCS requests.

- Cooperating with Admission Control, and PC entitles of the RRM to provide the system stability in terms of radio resources.

- Controlling the RTD measurement mechanism. It may also forward the results of the RTD, ATD (or any similar timing parameter) measurements to the PCF.

20

- Controlling the IS-DL mechanism for positioning measurements. This may include the overall control of the periodical measurements fulfilment.

25

Simultaneous positioning requests must be queued in a controlled manner. Possible priority differences should be taken in account, e.g. for emergency calls.

- 30 In the following, differences of the invention to GSM are described. The main architectural aspects which are different from GSM are as followings:

- Basic Functional Entities allocation to reference configuration. They are allocated to WCDMA system architecture including SRNC and DRNC.

5   • PRRM is a new entity that takes care of UL and DL signal power allocation, adjustment and variation due to positioning process. The PRRM functionality may be fulfilled in an RRM (Radio Resource Management) or the RNC (Radio Network Controller) element.

10

- Iur related procedure used in the positioning process.

15   • RANMAP related procedure used in the positioning process (wherein RANMAP refers to Radio Access Network Mobile Application Protocol. Recently, it is also called RANAP, i.e., Radio Access Network Application Protocol).

20   • PRCF is allocated to RNC because of existing measurement for RNC controlling that can be use also for positioning purposes and vice versa.

- PCF is allocated to RNC because of signalling traffic optimizing.

25   In the following, the requirements on the UMTS network elements described in connection with Fig. 5 are described partly with reference to the functionalities described in connection with Fig. 6.

30   The requirements on the 3G-MSC are similar to GSM, but the SMLC (Serving MLC) functionality is integrated in the SRNC. The functions of the MSC in connection with positioning are billing, coordinate, location request, authorizing and operating the location services.

35

The requirements on the SGSN are similar to the requirements for the MSC. The functions of SGSN are billing, coordinate, location request, authorizing and operating the location services.

5

Regarding the requirements on the mobile station, it is assumed that the mobile station is capable of supporting both network-based and mobile-based positioning.

Therefore, the mobile station is responsible for  
10 calculating the position of the mobile while a mobile-based positioning approach is applied, gathering UL/DL radio signal measurements for calculating a position of the mobile station concerned, and supporting the logical interface between the LCS client and the LCS server.

15 Additionally, the use of IS-D1 sets the following requirements on the mobile station:

- The mobile station should be able to measure and store the signal during idle periods.

20

- The mobile station should be able to correlate with different BCH codes between idle periods.

- The mobile station needs to determine the arrival time  
25 of the first detectable path, both for the serving BTS and the other BTSS that it detects.

- The mobile station must know when the idle period occurs.

30

- The mobile station must be able to report the results back to the network.

Next, the requirements on the base station (Node B) are  
35 described. The base station (Node B) needs to be able to

shut down the transmission during the idle period. This mechanism can be predefined in the functionality of the base station (NB functionality) or can be controlled by the RNC. Furthermore, the base station (Node B) should be  
5 able to handle the functionality of LMU including the functionality of a Positioning Signal Measurement Function (PSMF) and a Location System Operations Function (LSOF). Thus, it is responsible for gathering the UL/DL radio signal measurements for calculating the position of  
10 the target mobile station. The base station is also involved in the overall operation of the LCS in the system.

Next, the requirements on the RNC are described. The RNC  
15 should be able to control the TDOA IS-DL mechanism, handling the power ceasing period. The RNC should be able to handle the functionality of the Location System Operations Function (LSOF), Positioning Radio Coordination Function (PRCF), Positioning Calculation  
20 Function (PCF) and Positioning Radio Resource Management (PRRM) entities. This includes data provisioning of data, positioning capabilities, LCS operation, location calculation, managing the positioning of a mobile station through overall coordination and scheduling of resources  
25 to perform positioning measurements, and controlling the LCS radio accesses.

In the following, the requirements on the UMTS network interfaces are described.

30

The lu interface should be able of transforming coordinate estimates over RANAP protocol from the RNC to the MSC/GMLC, transforming the MS positioning related NAS (Non Access Status) messages including paging,  
35 authentication, etc. Messages over the RANAP protocol,

mapping the LCS QoS attributes, and handling state information between the 3G-MSC and the UTRAN.

Next, the requirement on the lur interface is described.

5 Generally, the main responsibility of the lur interface is related to supporting the inter-RNC soft handover. That should also include the LCS. That is, that whenever an inter-RNC soft handover occurs, the lur interface should be able to support the functionality of the  
10 positioning entities in RNCs, including a Positioning Calculation Function (PCF), a Positioning Radio Resource Management (PRRM), a Positioning Signal Measurement Function (PSMF) and a Location System Operations Function (LSOF). It is noted that these functions are described  
15 later in greater detail with respect to Fig. 6. In addition to that, in case of a SRNC relocation, the lur interface should support the relocation mechanism in order that a DRNC (Drift Radio Network Controller) is able to handle the responsibility of SRNC in LCS process,  
20 that is, to transfer the PCF, PRRM, PSMF and LSOF functionality (described above with reference to Fig. 6) from SRNC to DRNC.

Furthermore, the responsibility of the lub interface in  
25 conjunction with LCS is to support the following procedures:

- Performing TDOA IS-DL measurements periodically or in accordance with predetermined parameters,  
30
- Performing procedures between LMU and LCS entities located in the RNC, and
- Reserving resources, including FACH/RACH or DCH for MS  
35 positioning purposes.



Next, the basic procedure according to the invention is described. Like in every positioning process, in relay based positioning the reference coordinates (base stations or MS nodes as described above) and the mobile station to be localized should be synchronized. A synchronization between BSs and MS can be achieved by using DL SCH or even TCH with screaming code, spreading factor and so on. The synchronization of the mobile station and the MS node can be done by using Calling Channel (CCH) in ODMA probing process, a mechanism used by ODMA nodes to detect neighbours which may be used as relay during a call.

After synchronization, the mobile station sends/receives its location related measurements through the MS nodes to the network by using CCH and the broadcast probes mechanism. Generally speaking, during network base positioning following steps are processed:

1. Positioning requested from GMLC.
2. Routing information transformation between GMLC and WMSC/HLR through the MAP.
3. Providing Subscriber location between GMLC and WMSC/VLR through the MAP.
4. MS paging, authentication, Ciphering directly or through the MS nodes.
5. Location performing by using relay based positioning method and utilizing corresponding algorithms e.g. TOA, TDOA, and etc.

6. Location estimate parameter transfer between RNC and WMSC/VLR via the RANAP. Alternatively, the location estimates may be directly transferred to the OMC.

5

In the following, the above procedure is described for the case of a Mobile Terminated Location Request (MT-LR) Procedure for circuit switched calls with reference to Fig. 7.

10

First, a Location Preparation Procedure is described.

Step 1 (LSC\_SERVICE\_REQ): An external LCS client requests the current location of a target MS from a GMLC. The GMLC  
15 verifies the identity of the LCS client and its subscription to the LCS service requested and derives the MSISDN (Mobile subscriber ISDN) or IMSI of the target MS to be located and the LCS QoS from either subscription data or data supplied by the LCS client. For a call  
20 related location request, the GMLC obtains and authenticates the called party number of the LCS client. If location is required for more than one mobile station, or if periodic location is requested, steps 2 to 10 below may be repeated

25

Step 2 (MAP\_ROUTING\_INFO): If the GMLC already knows both the 3G-MSC location and IMSI for the particular MSISDN (e.g., from a previous location request), this step and step 3 may be skipped. Otherwise, the GMLC sends a  
30 MAP\_SEND\_ROUTING\_INFO\_FOR\_LCS message to the home location register HLR of the target MS to be located with either the IMSI or MSISDN of this MS.

Step 3 (MAP\_ROUTING\_INFO\_ACK): The HLR verifies that the  
35 SCCP calling party address of the GMLC corresponds to a

known GSM network element that is authorized to request MS location information. The HLR then returns the current 3G-MSC address and the IMSI and MSISDN for the particular MS.

5

Step 4 (MAP\_MS\_LOCATION): The GMLC sends a MAP\_PROVIDE\_SUBSCRIBER\_LOCATION message to the 3G-MSC indicated by the HLR. This message carries the MS subscribers IMSI, LCS QoS (Quality of Service) information and an indication of whether the LCS client has the override capability. For a call related location request, the message also carries the LCS clients called party number. This message may optionally carry the identity of the LCS client.

15

Step 5 (PAGING\_AUTHENTICATION\_CIPHERING): If the GMLC is located in another PLMN or another country, the 3G-MSC (Mobile service center for third generation) first authenticates that a location request is allowed from this PLMN or from this country. If not, an error response is returned. If the target MS has an established circuit call other than speech, the location request is denied and an error response is returned to the GMLC. Otherwise, the 3G-MSC then verifies LCS barring restrictions in the MS user's subscription profile in the VLR (Visitor Location Register). If the LCS is barred and a LCS client accessing a GMLC in the same country does not have the override capability (i.e., is allowed to perform the LCS anyway), an error response is returned to the GMLC. Otherwise, if the MS is in an idle mode, the VLR performs paging, authentication and ciphering. This procedure may provide the MS user's current cell ID and Timing Alignment/Radio Interface Synchronization value in the RANAP layer 3 Information used to convey the Paging Response. If the MS is instead in a dedicated mode, the

35

3G-MSC will have been supplied with the current cell ID from either the serving BSC (base station controller) or serving MSC (mobile switching center) in the case of an established call with inter 3G-MSC handover.

5

It is to be noted that in parallel with or after performing any basic procedure i.e. paging, authentication etc., a signalling setup link should be performed. It is assumed that common channels like

10 RACH/FACH and paging channel are preferably used for LCS purpose.

Step 6 (RANAP\_PERFORM\_LOCATION): The 3G-MSC sends a RANAP\_PERFORM\_LOCATION message to the SRNC. This message  
15 includes the MS's location capabilities and requested QoS.

Next, the positioning measurement establishment procedure is described.

20

Step 7: If the requested location accuracy within the QoS can be satisfied, the SRNC may send a RANAP\_PERFORM\_LOCATION\_ACK immediately. Otherwise, the SRNC determines the positioning method and instigates the  
25 particular message sequence for this method. Especially, here the method described above with reference to Figs. 2 to 4 can be used. If the positioning method returns position measurements, the SRNC uses them to compute a location estimate. If there has been a failure to obtain  
30 position measurements, the SRNC may use the current cell ID and a TA/RIS (Timing Advance/Radio Interface Synchronization, e.g. frame timing offset) value to derive an approximate location estimate. If an already computed location estimate is returned for an MS based  
35 positioning method, the SRNC may verify consistency with

the current cell ID and TA/RIS value. If the location estimate so obtained does not satisfy the requested accuracy and sufficient response time still remains, the SRNC may instigate a further location attempt using the  
5 same or a different positioning method.

Additionally, if the IS-DL is concerned, the SRNC may send a message to the BS/Node B to indicate the power  
10 cease period of the BSs involved in the positioning process. Alternatively, this can be a part of basic functionality of the BSs.

Next, a location calculation and release procedure is described.  
15

Step 8 (RANAP\_PER\_LOCATION\_ACK): When a location estimate best satisfying the requested QoS has been obtained, the SRNC returns it to the 3G-MSC or OMC.

20 Step 9 (MS\_LOCATION\_ACK): The 3G-MSC returns the location estimate to the GMLC. The VLR (visitor location register) may then release the Mobility Management (MM) connection to the MS, if the MS was previously idle, and the 3G-MSC may record billing Information.

25 Step 10 (LCS\_SERVICE\_RESPOND): The GMLC returns the MS location estimate to the requesting LCS client. If the LCS client requires it, the GMLC may first transform the universal location coordinates provided by the 3G-MSC,  
30 into some local geographic system. The GMLC may record billing for both the LCS client and inter-network revenue charges from the 3G-MSC's network.

In the following, a mobile originated location request (MO-LR) for circuit calls is described with reference to Fig. 8.

5 Steps 1 to 4 form a location preparation procedure.

Step 1 (CM\_SERVICE\_REQUEST). An initially idle MS requests an RACH (random access channel) and sends a CM (Connection Management) Service Request indicating a  
10 request for an MOC (mobile originated call) to the 3G-MSC via the RNC (radio network controller).

Step 2 (RANAP\_CM\_SERVICE\_REQUEST): The RNC includes the current cell ID and within the RANAP Complete Layer 3  
15 Information message used to convey the CM service request across the lu-interface. The MS may identify itself using a TMSI, IMSI, IMEI, etc.

Step 3 (AUTHENTICATION\_CIPHERING): The 3G-MSC, RNC and MS  
20 continue the normal procedure for authentication and ciphering. Depending on local regulatory requirements, the sending of call setup information into the PSTN may be delayed until either the MS's location has been obtained or the location attempt has failed or a PLMN  
25 defined timer has expired before location was obtained. Call setup information sent into the PSTN may include the MS location (if already obtained) plus information that will enable, for instance, the emergency service provider to request MS location at a later time.

30

Step 4 (RANAP\_PERFORM\_LOCATION\_ACK): At any time after step 1, the 3G-MSC may initiate procedures to obtain the MS's location. These procedures may run in parallel with the MO-LR call origination. The 3G-MSC sends a  
35 RANAP\_PERFORM\_LOCATION message to the SRNC associated

with the MS's current location area. This message includes the MS's location capabilities and the QoS required for an emergency call and the current Cell ID, timing offset, etc.

5

The following step 5 forms a positioning measurement establishment procedure.

Step 5: If the requested location accuracy is sufficient  
10 (i.e., within the QoS), the SRNC may send a  
RANAP\_PERFORM\_LOCATION ack. immediately. Otherwise, the  
SRNC determines the positioning method and instigates the  
particular message sequence for this method defined in  
subsequent sections. If the positioning method returns  
15 position measurements, the SRNC uses them to compute a  
location estimate. If there has been a failure to obtain  
position measurements, the SRNC may use the current cell  
ID or MS's latest location information to derive an  
approximate location estimate. If an already computed  
20 location estimate is returned for an MS based positioning  
method, the SRNC may verify consistency with the current  
cell ID. If the location estimate so obtained does not  
satisfy the requested accuracy and sufficient response  
time still remains, the SRNC may instigate a further  
25 location attempt using the same or a different  
positioning method.

The following steps 6 to 8 form a location calculation  
and release procedure.

30

Step 6 (RANAP\_PER\_LOCATION\_ACK): When a location estimate  
best satisfying the requested QoS has been obtained, the  
SRNC returns it to the 3G-MSC over lu interface.

Step 7 (CM\_LCS\_REQUEST\_ACK.): The 3G-MSC responds to the MS positioning request by sending a CM Service Request acknowledgement for an MOC (mobile originated call) to the MS.

5

Step 8 (MAP\_SUBSCRIBER\_LCS\_RESPO): Depending on local regulatory requirements, the 3G-MSC may send a MAP Subscriber Location report to a GMLC. This message shall carry any location estimate returned in step 6 and may carry the MSISDN, IMSI and IMEI of the calling MS. Additionally, the GMLC may optionally forward any information received in step 9 to the LCS client.

10  
It is to be noted that in case of positioning of emergency call, step 3 of the pervious sequence is naturally omitted.

15  
The above described preferred embodiment of the invention has been described with respect to circuit switched calls by referring to Figs 7 and 8. However, the method according to the invention is also applicable to packet switched calls.

20  
In case of a packet switched, mobile terminated location request (MT-LR), the general procedure therefor is in principle the same as that shown in Fig. 7.

25  
Furthermore, in case of a packet switched, mobile originating location request (MO-LR), the general procedure is in principle the same as that shown in Fig. 8, except that no connection management (CM) but a session management (SM) is performed, such that the corresponding steps are accordingly modified.

30



Moreover, if during the positioning procedure base stations are concerned which are not connected by the above mentioned Iur interface, the following approach may be applied: If during the positioning process the  
5 concerned mobile station belongs to a handover active set and it may soon be handed over, then location measurement information may be transferred via the anchor 3G-MSC to the target base station (or RNC), to which the mobile station will be accessed. If the mobile station does not  
10 belong to the handover active set, that is, that it will not be handed over soon, then parameters required for a positioning calculation (e.g., coordination of neighbouring base stations, synchronization, etc.) related to the neighbouring base station(s) could be  
15 transferred from the neighbouring base station (or RNC) to the serving RNC (or corresponding element responsible for location calculating) via the anchor and serving 3G-MSCs. This solution is also applicable to a GSM system in which BSCs (Base Station Controllers) are not connected  
20 to each other at all.

By the above method, it is possible to locate a mobile station even if there is no any LOS (Line of Sight), i.e., a direct connection via air, from neighbouring base  
25 stations. As described above, this is achieved by utilizing the ODMA relay technique in WCDMA. ODMA is already evaluated by ETSI and is defined as a very potential solution for WCDMA coverage extension particularly when there is no LOS due to shadowing and so  
30 on.

Moreover, by the method according to the present invention it is possible to locate a mobile station by one or two LOS (Line of Sight) from neighbouring base

stations without any special antenna or additional complexity to the mobile station or the base station.

Furthermore, the interference due to positioning process  
5 are reduced. This is a vital issue for WCDMA, since WCDMA is a very interference dependent multiple access.

In addition, the method according to the invention is a potential complementary to other existing positioning  
10 methods.

Moreover, it is based on relay technology that has been already evaluated as a potential solution for WCDMA performance. Thus, the method according to the invention  
15 can easily be implemented in existing systems.

Claims

1. A method for locating a mobile station comprising  
5 the steps of

using fixed transmitting stations (BS1, BS2, BS3)  
for positioning a target mobile station (MS1) by  
transmitting a measurement signal from each fixed  
transmitting station to said mobile station,

10 using a relay station (MSN1 - MSN5) which is adapted  
to receive said measurement signal from the corresponding  
fixed transmitting station and to forward said signal to  
said target mobile station (MS1), in case a direct  
transmission from one or more of said fixed transmitting  
15 stations (BS1, BS2, BS3) is not available,

determining the distance between said target mobile  
station (MS1) to the fixed transmitting stations and/or  
the relay stations on the basis of said measurement  
signal, and

20 locating the position of said target mobile station  
on the basis of the determined distances.

2. The method according to claim 1, wherein said relay  
station (MSN1 - MSN5) is a movable mobile station.

25

3. The method according to claim 2, wherein a distance  
D (D1, D2, D3) between said relay station and said target  
mobile station is calculated based on the following  
equation:

30

$$D = c\Delta t + \beta d_{\max},$$

wherein c is the light velocity,  $\Delta t$  is the  
propagation delay of the measurement signal,  $\beta$  is in a

range from -1 to +1, and  $d_{\max}$  is the maximum distance by which the relay station can move during  $\Delta t$ .

4. The method according to claim 3, wherein said  
5 distance  $d_{\max}$  is determined by the following equation:

$$d_{\max} = v_{\max} \Delta t + e,$$

wherein  $v_{\max}$  is the maximum velocity of the relay  
10 station and  $e$  is a measurement error.

5. The method according to claim 1, comprising the step  
of judging whether a request for a location of said  
target mobile station is authorized or not.

15

6. The method according to claim 5, wherein for said  
judging step subscriber data of a data base (HLR) are  
used.

- 20 7. The method according to claim 1, comprising the step  
of synchronizing said base stations and said mobile  
stations involved in the positioning before performing  
said locating step.

- 25 8. The method according to any one of the previous  
claims, wherein the calculation of the location of said  
target mobile station is performed on the basis of any  
positioning method based on radio wave propagation data.

- 30 9. The method according to claim 8, wherein said  
positioning method based on radio wave propagation data  
is one of TDOA, TOA or TA.

10. The method according to any one of the previous claims, wherein said method is carried out in a WCDMA network.

5 11. The method according to any one of the previous claims, wherein each positioning request is provided with a priority level and in case of a plurality of simultaneous positioning request, the positioning requests are processed in dependence on the priority  
10 level.

12. A radio network, comprising  
transmitting stations (BS1, BS2, BS3) which are adapted for positioning a target mobile station (MS1) by  
15 transmitting a measurement signal from each fixed transmitting station to said mobile station,

at least one relay station (MSN1 - MSN5) which is adapted to receive said measurement signal from the corresponding fixed transmitting station and to forward  
20 said signal to said target mobile station (MS1), in case a direct transmission said fixed transmitting stations (BS1, BS2, BS3) is not available, and

a means which is adapted to determine the distance between said target mobile station (MS1) to the fixed  
25 transmitting stations and/or the relay stations on the basis of said measurement signal, and

which is adapted to locate the position of said target mobile station on the basis of the determined distances.

30

13. The radio network according to claim 12, wherein said determination and location means is a mobile location center (GMLC).

14. The radio network according to claim 12 or 13, ,  
wherein said relay station (MSN1 - MSN5) is a movable  
mobile station.

5 15. The radio network according to claim 14, wherein a  
said determination means calculates said distance D (D1,  
D2, D3) between said relay station and said target mobile  
station based on the following equation:

10 
$$D = c\Delta t + \beta d_{\max},$$

wherein c is the light velocity,  $\Delta t$  is the  
propagation delay of the measurement signal,  $\beta$  is in a  
range from -1 to +1, and  $d_{\max}$  is the maximum distance by  
15 which the relay station can move during  $\Delta t$ .

16. The radio network according to claim 15, wherein  
said distance  $d_{\max}$  is determined by the following  
equation:

20 
$$d_{\max} = v_{\max}\Delta t + e,$$

wherein  $v_{\max}$  is the maximum velocity of the relay  
station and e is a measurement error.

25 17. The radio network according to claim 13, wherein  
said mobile location center (GMLC) is further adapted to  
judge whether a request for a location of said target  
mobile station is authorized or not.

30 18. The radio network according to claim 17, wherein  
said mobile location center (GMLC) is adapted to use  
subscriber data of a data base (HLR) are used.


19. The radio network according to any one of the claims  
12 to 18, wherein said radio network is a WCDMA network.

20. The radio network according to any one of the claims  
5 12 to 19, wherein each positioning request is provided  
with a priority level and in case of a plurality of  
simultaneous positioning request, said mobile location  
center (GMLC) is adapted to process the positioning  
requests in dependence on the priority level.

10

The present invention discloses a method for locating a mobile station, comprising the steps of using fixed transmitting stations (BS1, BS2, BS3) for locating a target mobile station (MS1) by transmitting a measurement signal from each fixed transmitting station to said mobile station, using a relay station (MSN1 - MSN5) which is adapted to receive said measurement signal from the corresponding fixed transmitting station and to forward said signal to said target mobile station (MS1), in case a direct transmission from one or more of said fixed transmitting stations (BS1, BS2, BS3) is not available, and determining the distance between said target mobile station (MS1) to the fixed transmitting stations and/or the relay stations on the basis of said measurement signal, and locating the position of said target mobile station on the basis of the determined distances. By the this method, it is possible to locate a mobile station even if there is no a direct connection via air to neighbouring base stations.



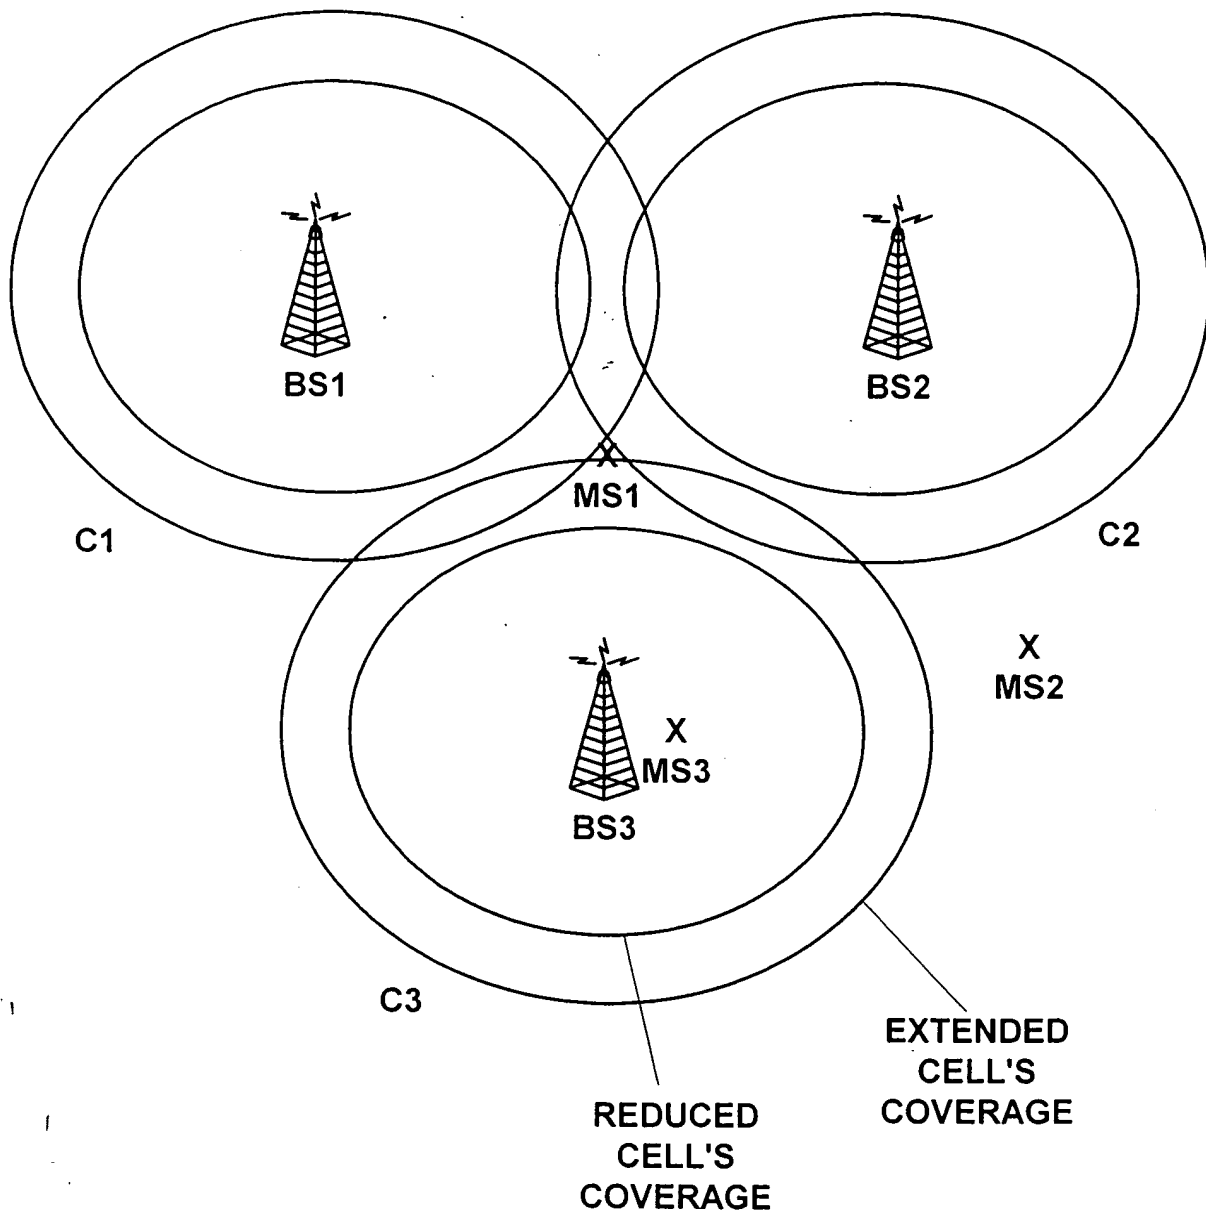

**FIG. 1**

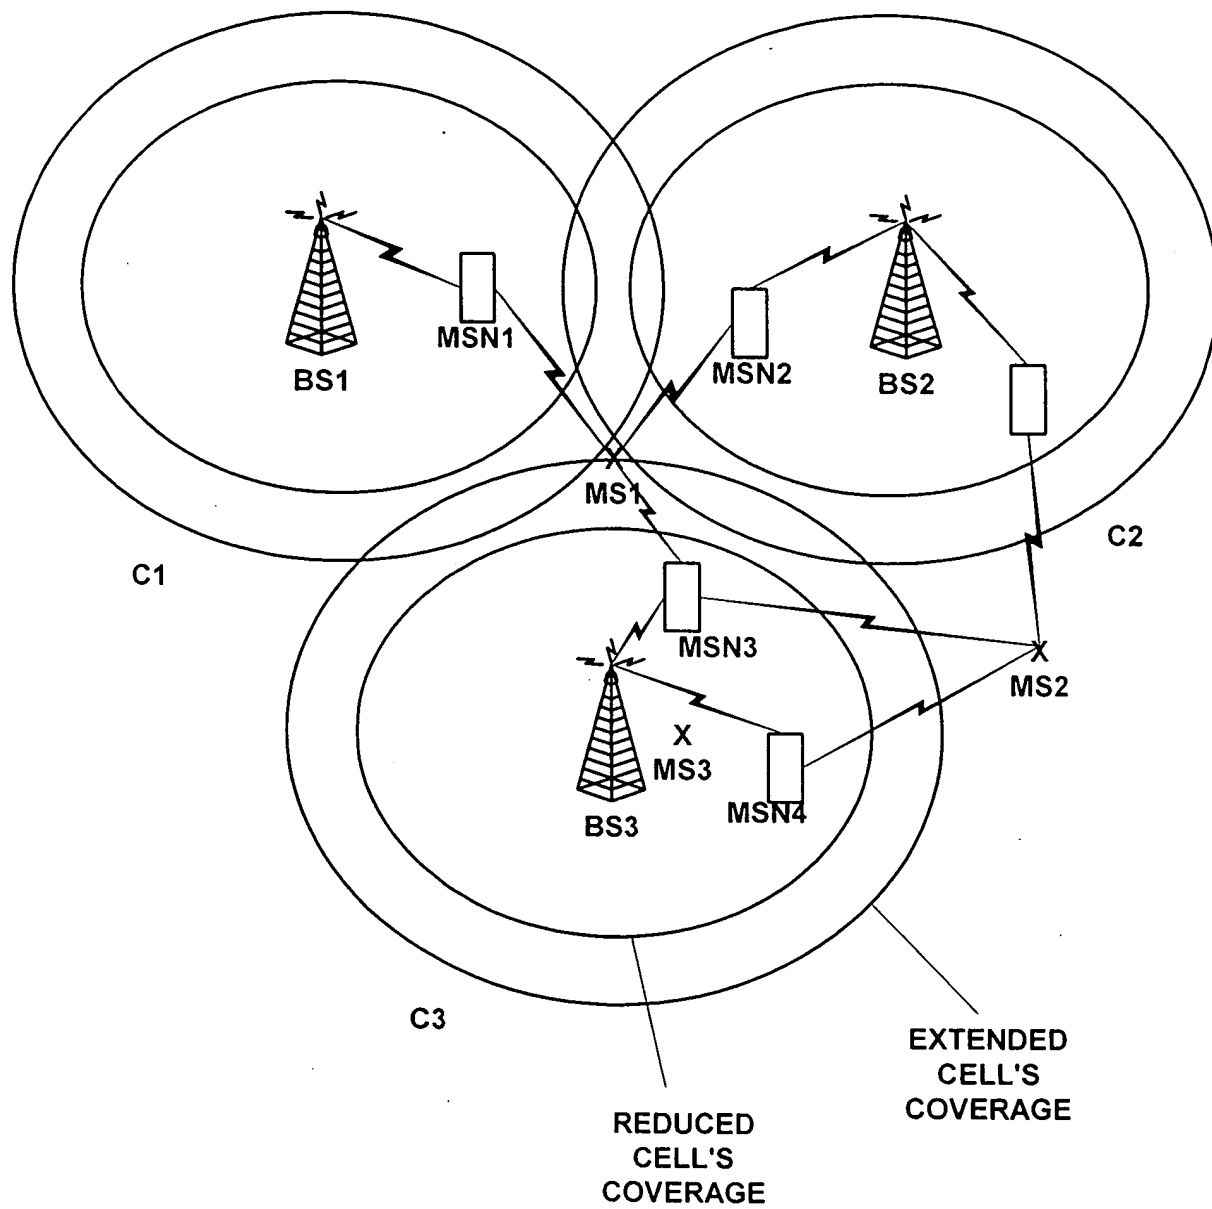


FIG. 2

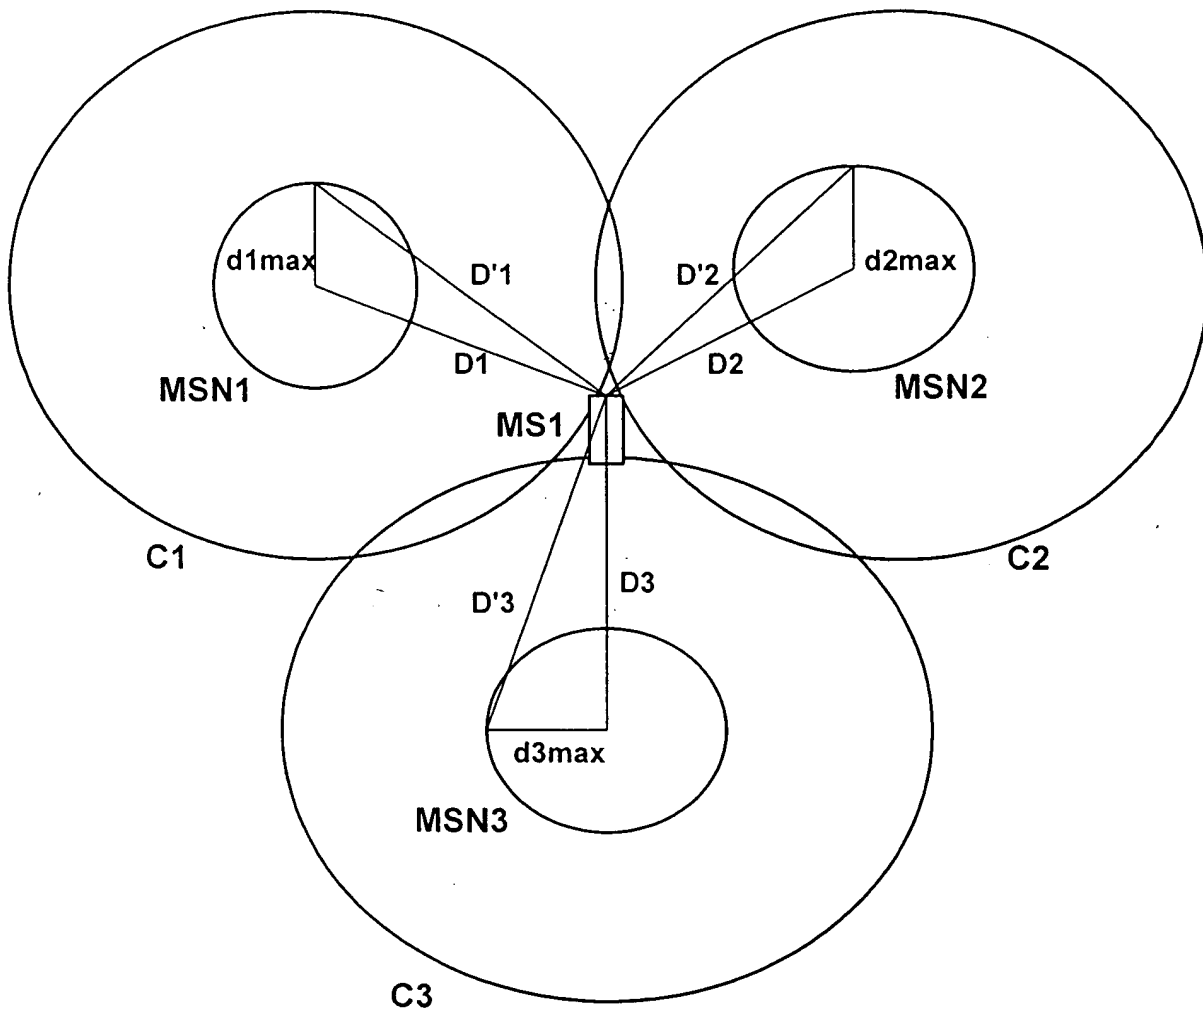
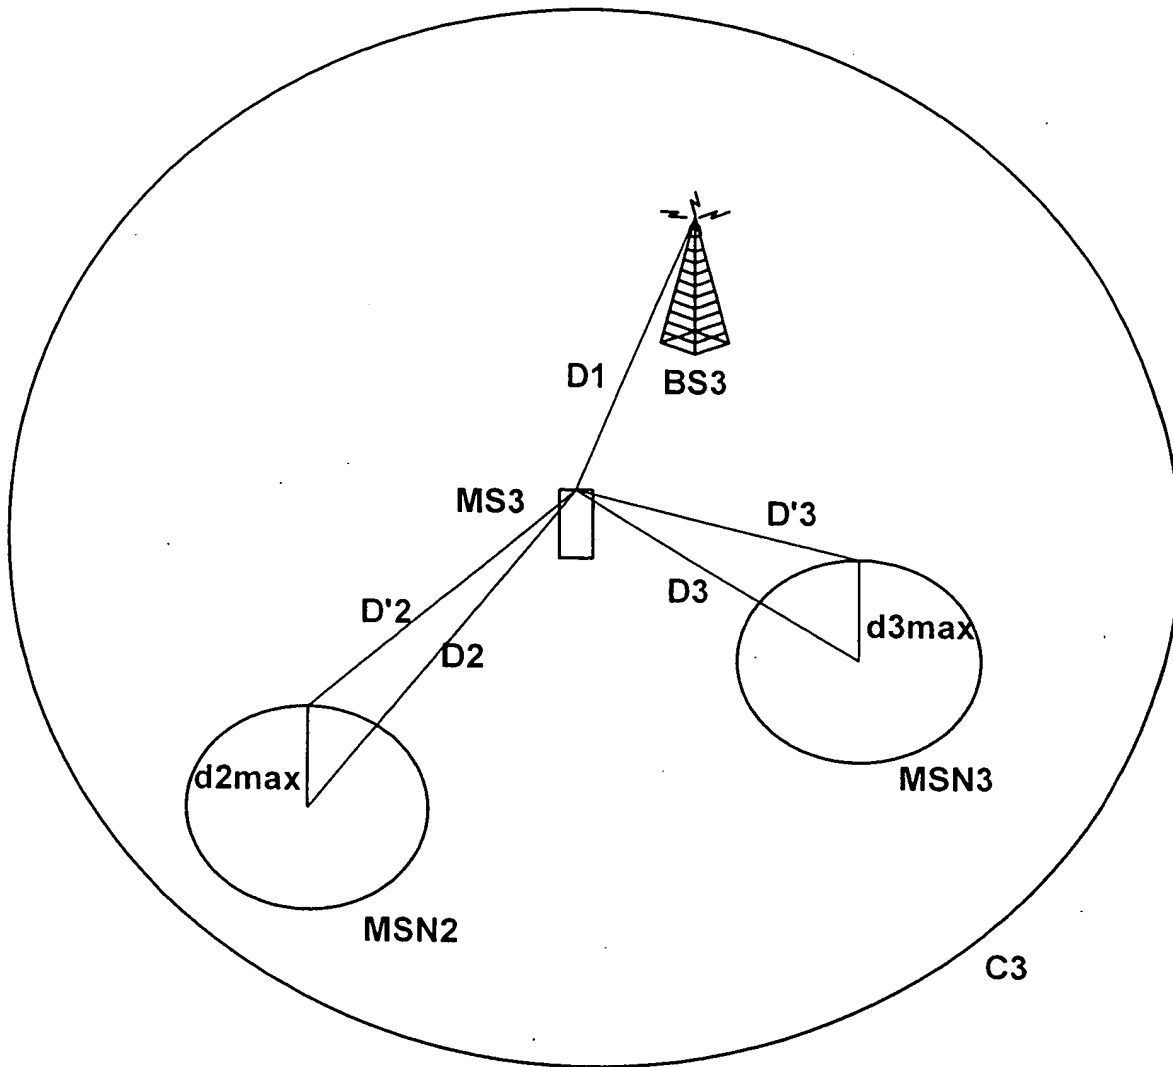


FIG. 3

**FIG. 4**

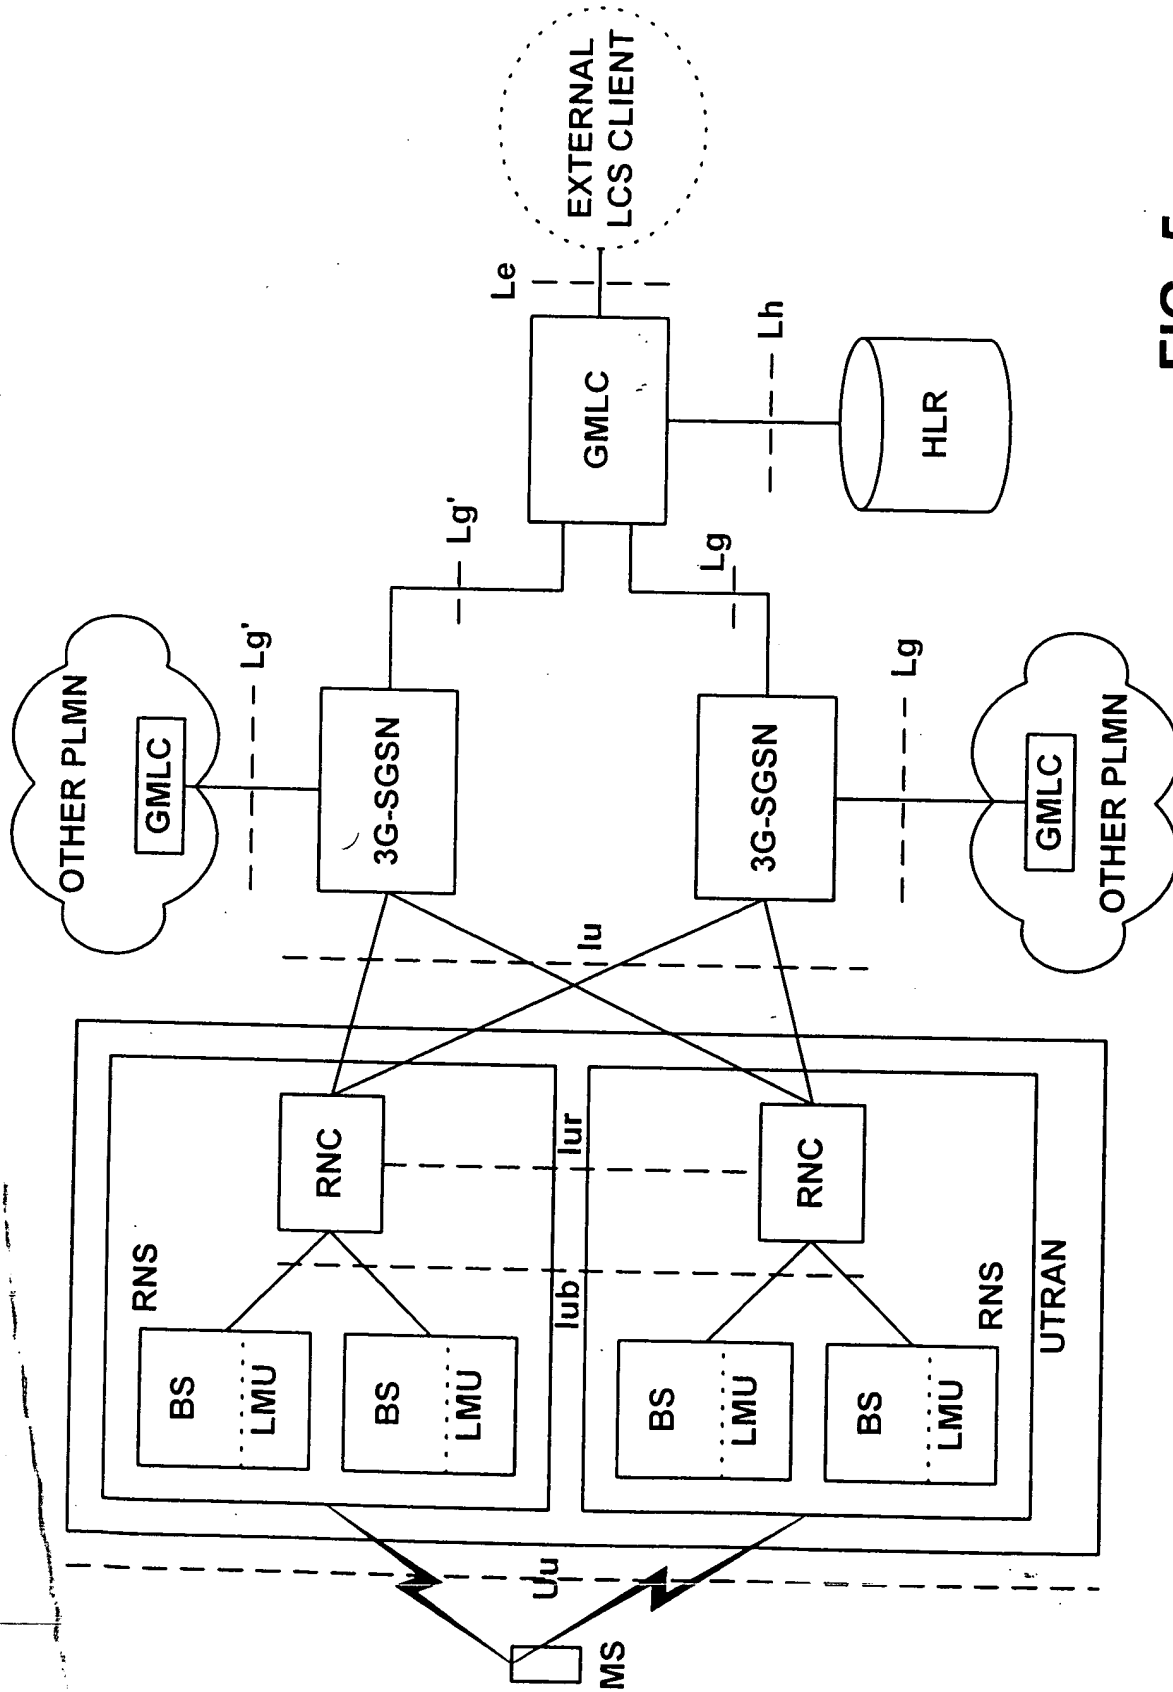


FIG. 5

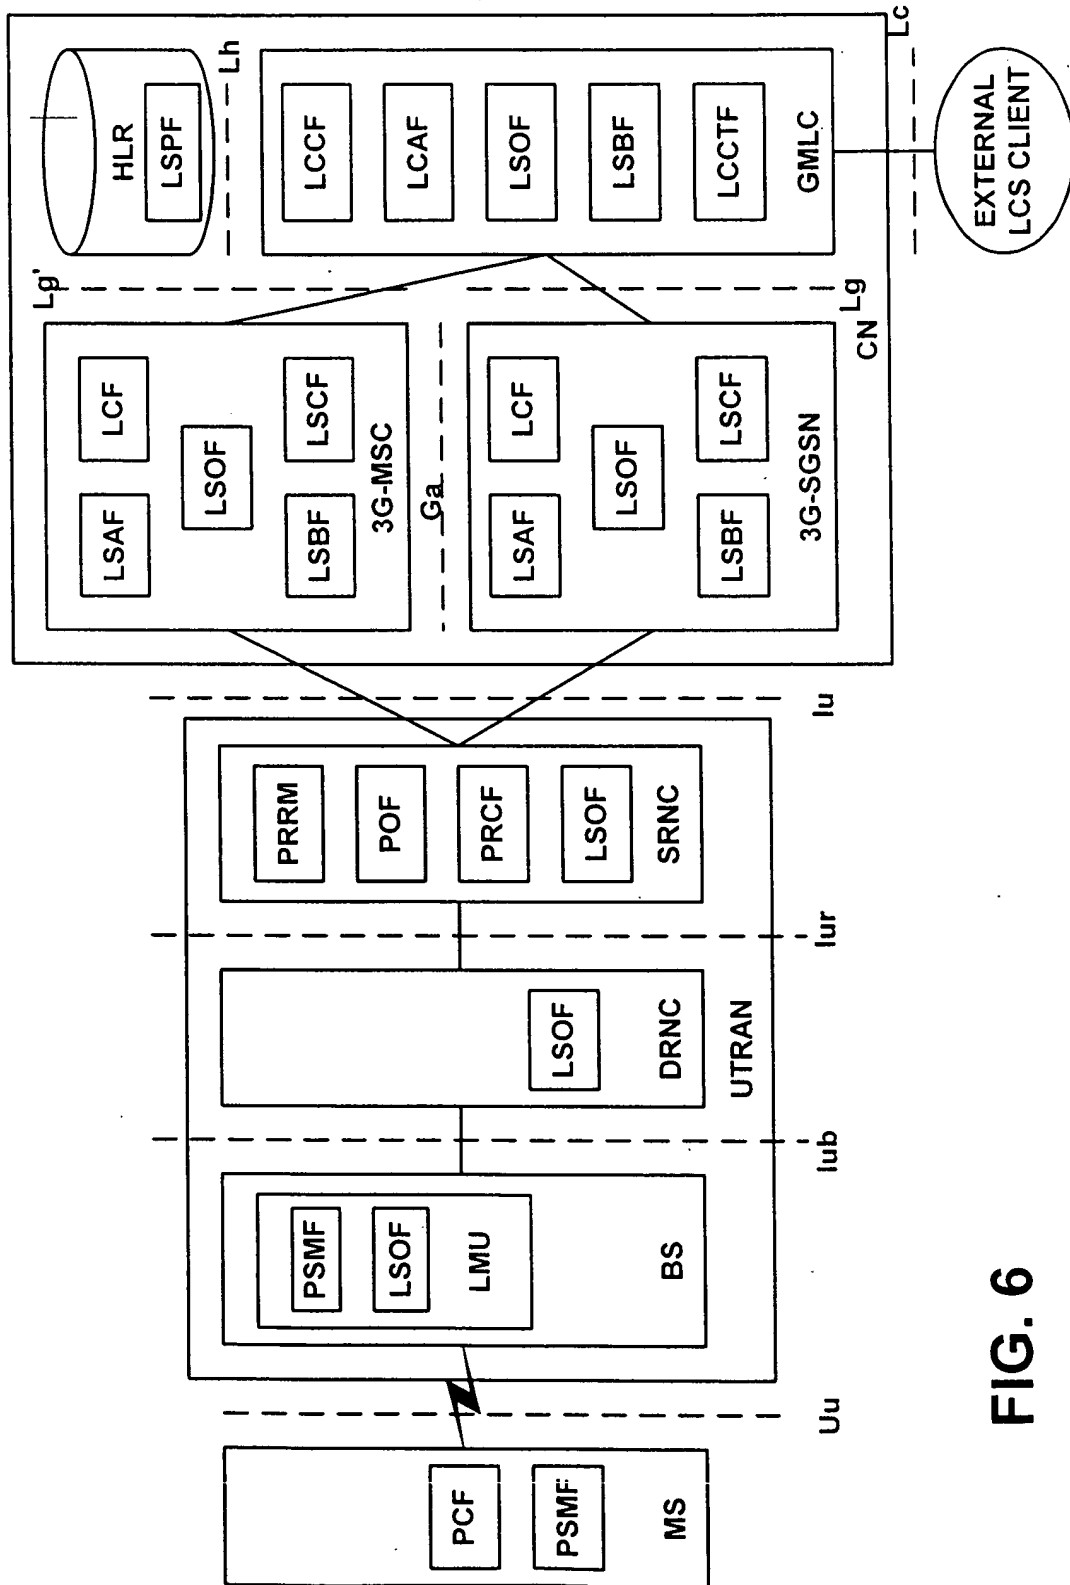


FIG. 6

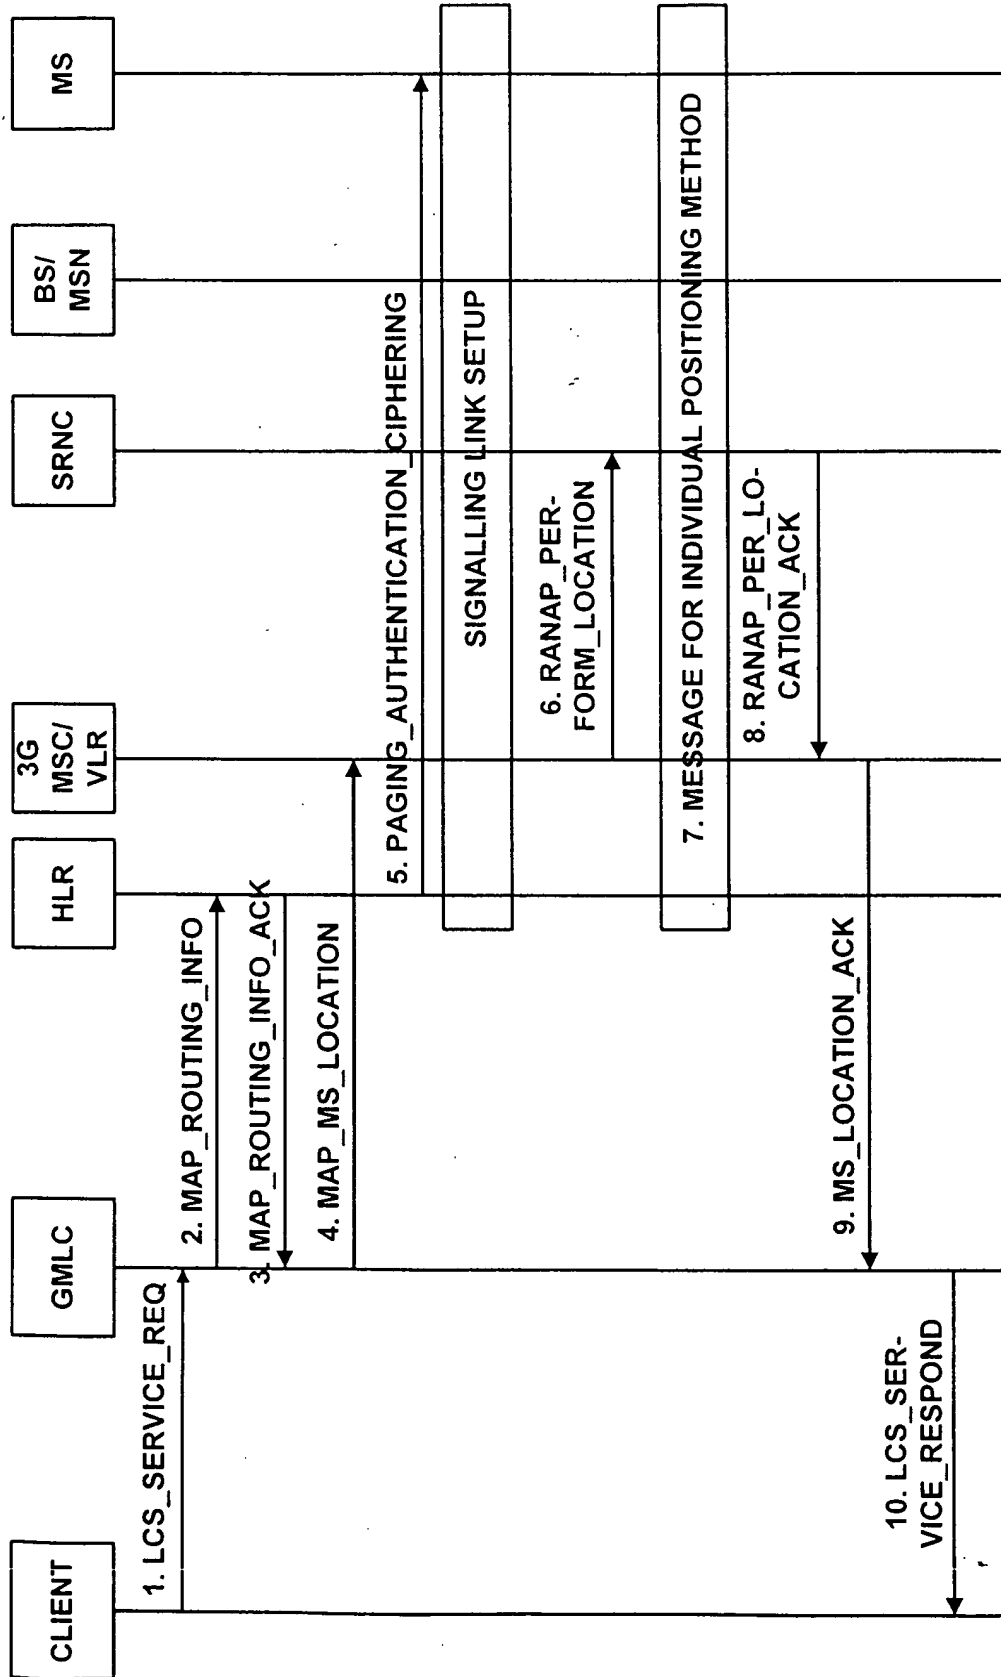


FIG. 7

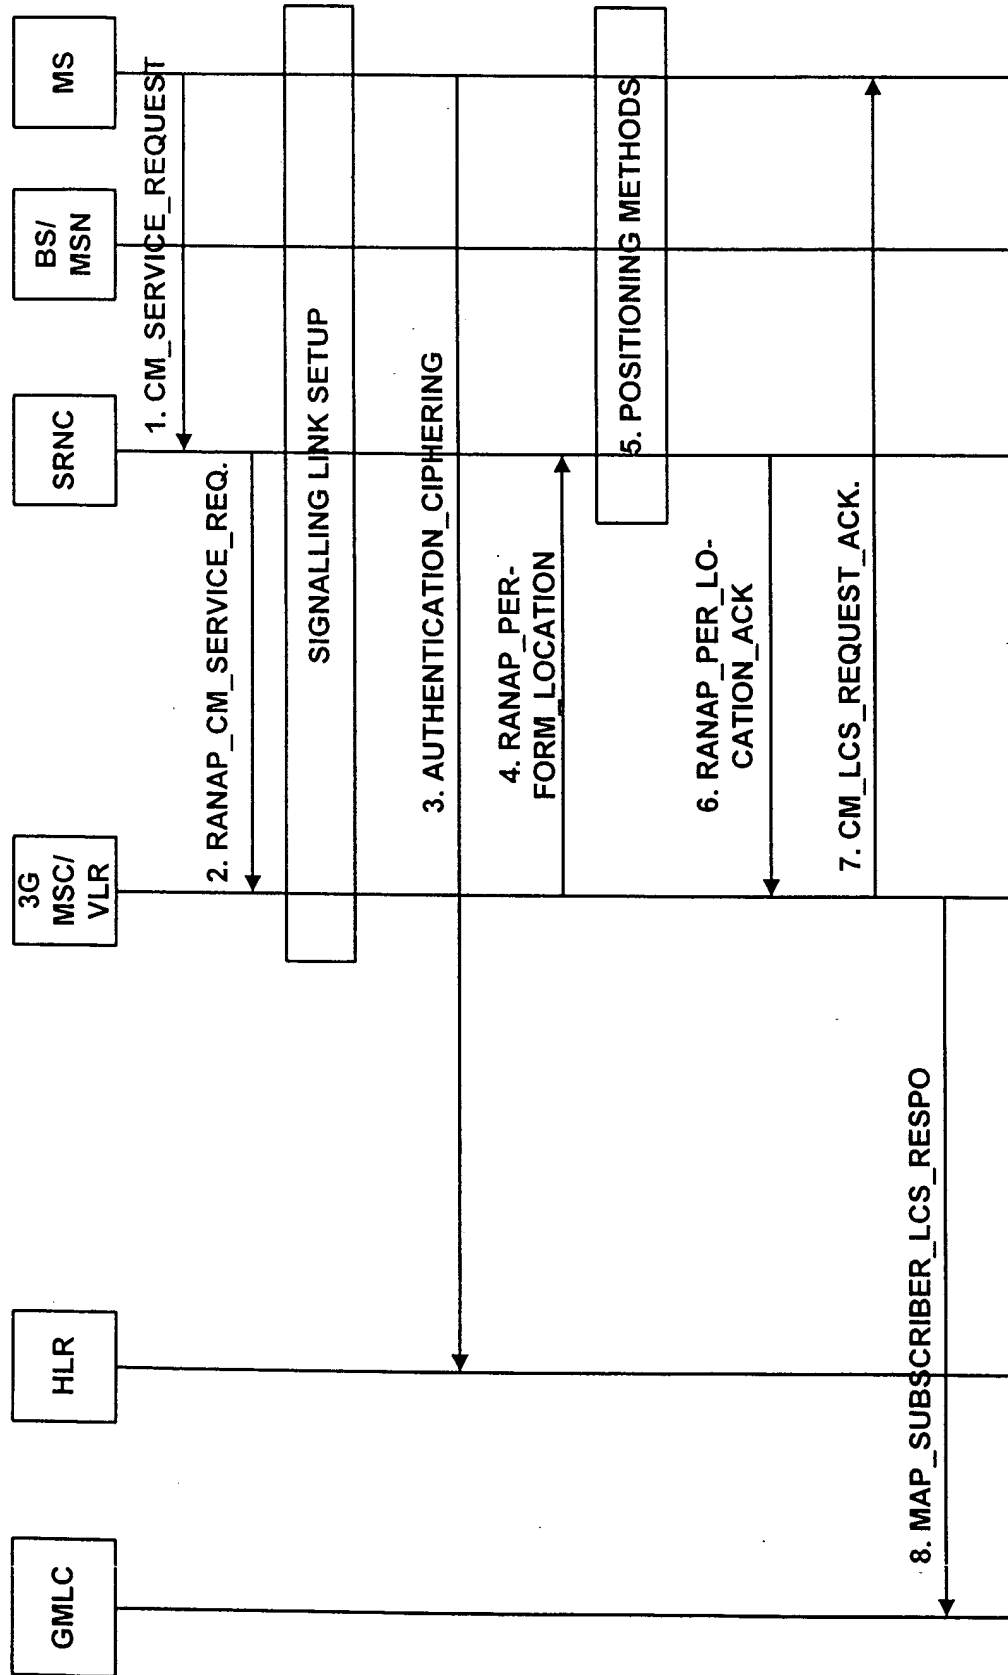


FIG. 8